


C H I P P E R S



NEGRI

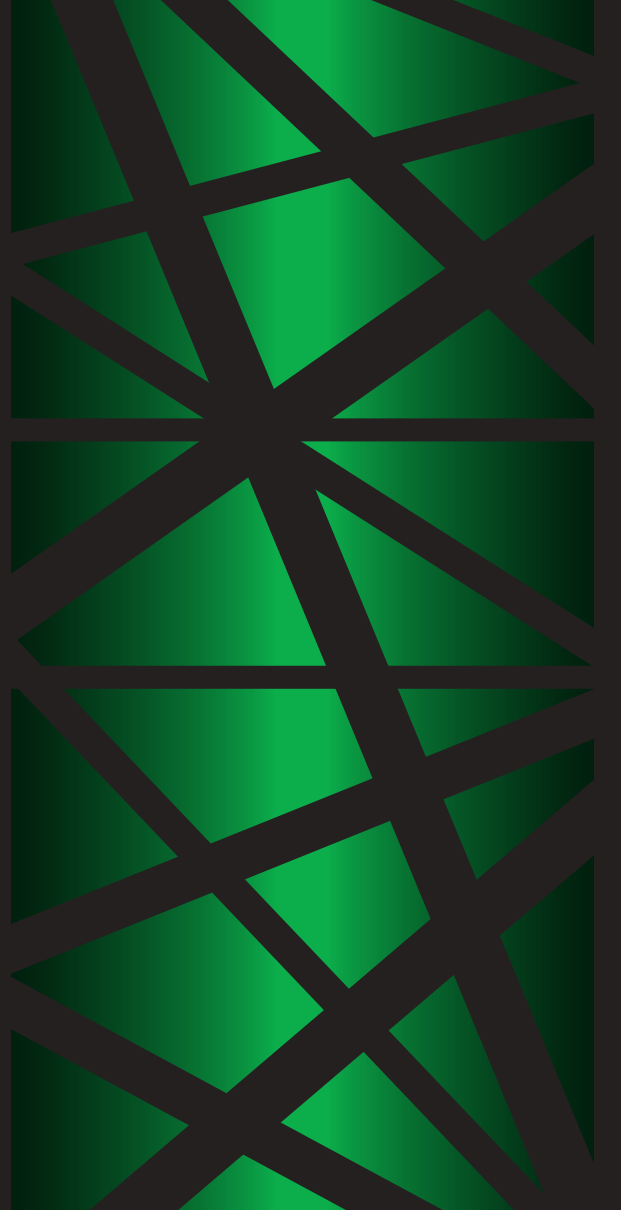


NEGRI, QUALITY MADE IN ITALY



FAMILY-RUN
BUSINESS



HEADQUARTERS
IN MANTUA

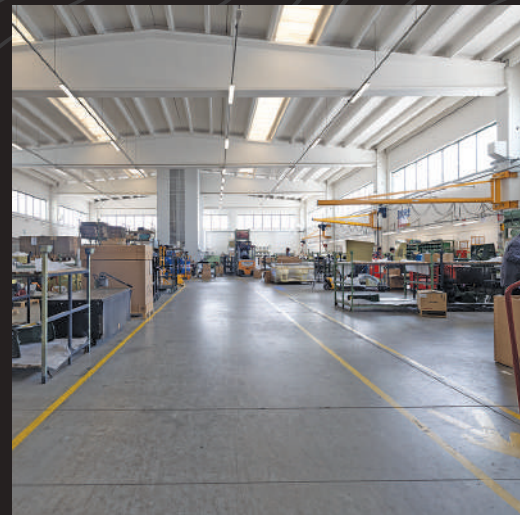

10.000 SQUARE METRES
PRODUCTION FACILITY



SPACIOUS AND PERMANENT
SHOWROOM



SALES
NETWORK



ON-SITE
DEMO SERVICE


NEGRI, QUALITY MADE IN ITALY



DESIGN AND
DEVELOPMENT



INTERNALIZED
PRODUCTION CHAIN

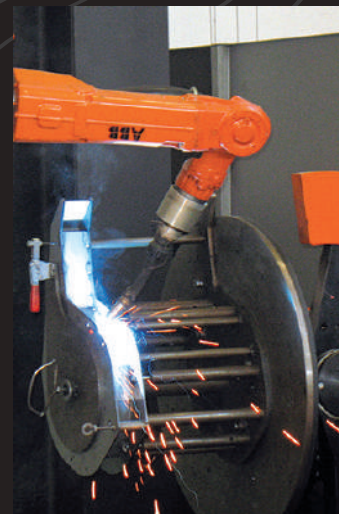

ROBOTIC
EQUIPMENT




QUALIFIED
PERSONNEL



ASSEMBLY
AND TESTING



TECHNICAL
ASSISTANCE

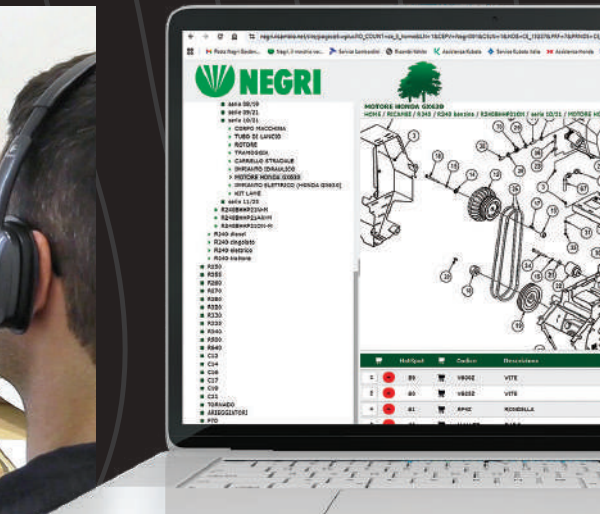

ONLINE SPARE
PARTS SHOP



* Input material/
Data depending
on the kind of
material and working
conditions.

	R70	R95	R185	C13	C17LT	C17	C21
To shred	50	70	90	150	170	170	210
Input material	2-3	3-6	6-7	2	7,5	3,5	5,2
Organic waste	OK	OK	OK	⊘	⊘	⊘	⊘
Leaves and hedges	OK	OK	OK	⚠	⚠	⚠	⚠
Brambles and shrubs	OK	OK	OK	OK	OK	OK	OK
Logs and branches	OK	OK	OK	OK	OK	OK	OK
Palm trees	⊘	⚠	⚠	⚠	⚠	⚠	⚠
Pallet	⊘	⊘	⊘	⊘	⊘	⊘	⊘
VE	⊘	⊘	⊘	⊘	⊘	⊘	⊘
PVC PET PE	⊘	⊘	⊘	⊘	⊘	⊘	⊘
ACC FE ALL PS	⊘	⊘	⊘	⊘	⊘	⊘	⊘




NEGRI



2 - 3
m³/h*



300 x 350
A x B mm



100 x 115
A x B mm



50
Ø max.* mm



1



6



1


R70




DISC WEIGHT: 6 kg




1 BLADE +
6 HAMMERS

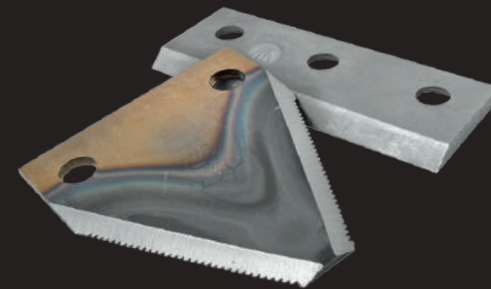

1 COUNTER-BLADE



REFINING SCREWS

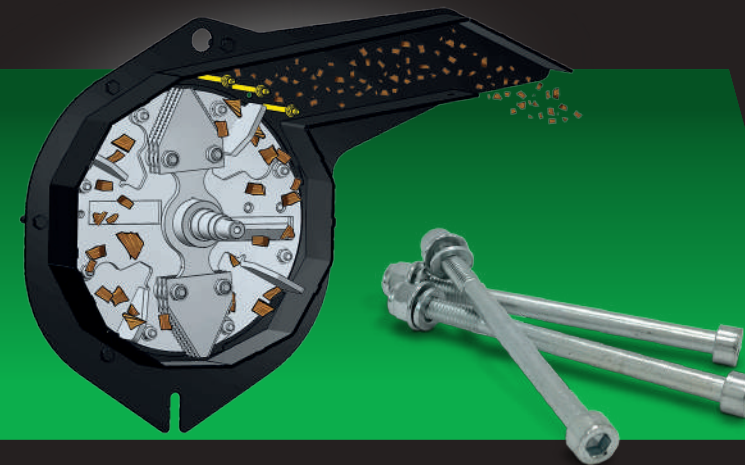




Electric
220 V - 50 Hz **hp2,5** (kW1,8)



Safety System

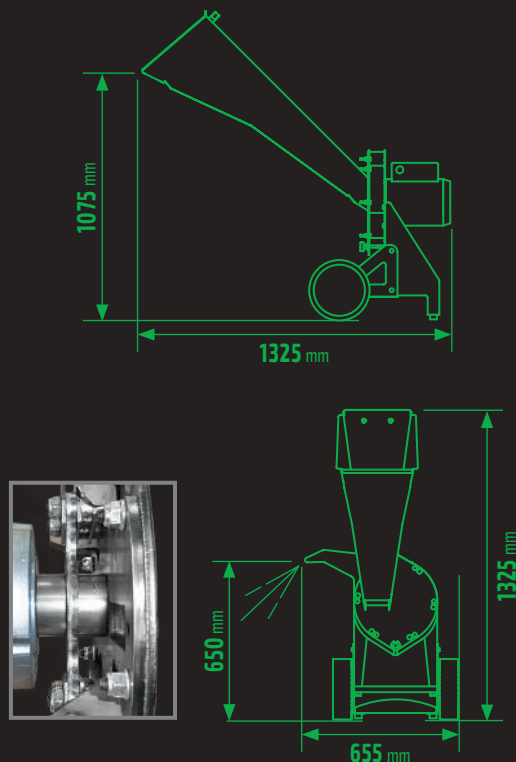

	0 000000		kg
	R70EHP25		220 V - 50 Hz
			55/70





E5 **Petrol**
HONDA GP160 **hp5,5** (kW4)
Petrol
LONCIN G210 **hp7** (kW5,1)



L **L/h**
3,1 1,1
L **L/h**
3,6 1,4

Safety System

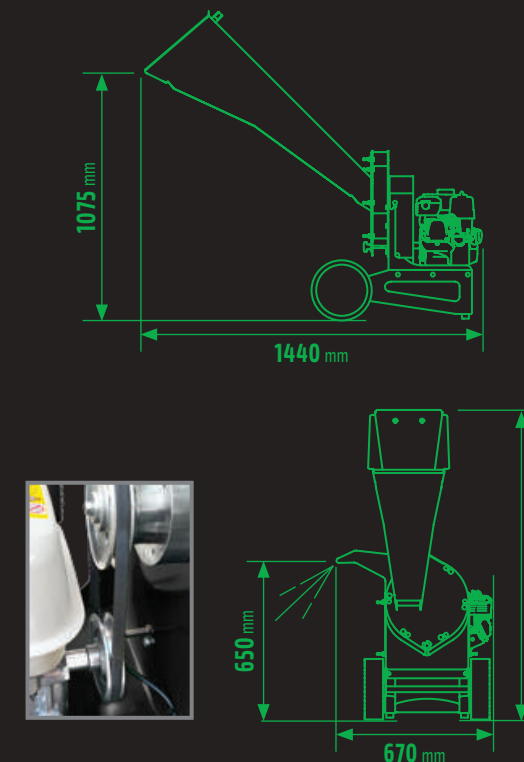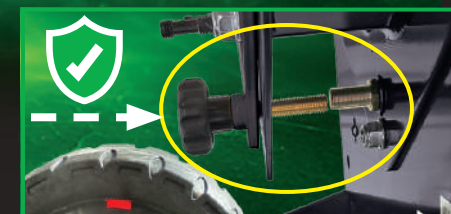

	0 000000		kg
	R70BHP55GP		E5
			70/90
	R70BLHP7		E5
			70/90



3 - 6
m³/h*



330 x 360
A x B mm



130 x 170
A x B mm



70
Ø max.* mm



1



8



1



R95



DISC WEIGHT: **11 kg**



**1 BLADE +
8 HAMMERS**

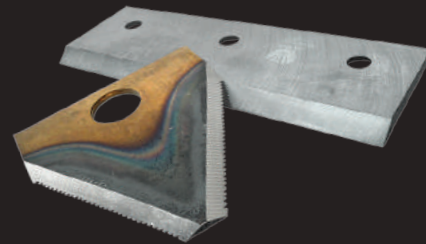


1 COUNTER-BLADE





ONLY hp **13/14**



**2 BLADES +
8 HAMMERS**





**MOBILE
REFINING
SCREEN**

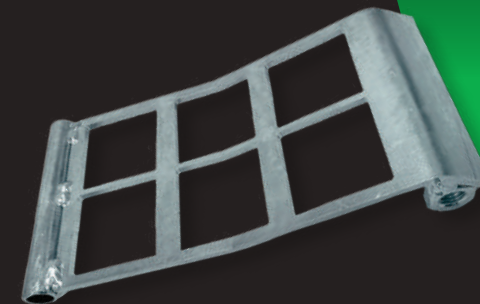



Electric
220 V - 50 Hz **hp3** (kW2,2)

Electric
380 V - 50 Hz **hp4** (kW3)

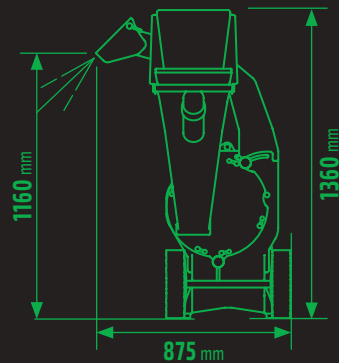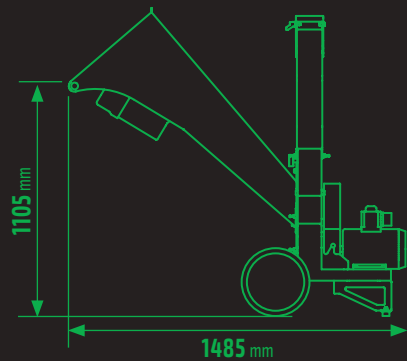

			
	0 000000		kg
	R95EHP3	 220 V - 50 Hz	95/115
	R95EHP4	 380 V - 50 Hz	95/115



E5




Petrol
HONDA GP160 **hp5,5** (kW4)
HONDA GX200 **hp6,5** (kW4,8)
HONDA GX390 **hp13** (kW9,6)

Petrol
LONCIN G210 **hp7** (kW5,1)
LONCIN G420 **hp14** (kW10,3)

 L L/h
3,1 1,1

 L L/h
3,1 1,4
6,1 2,8

Safety System

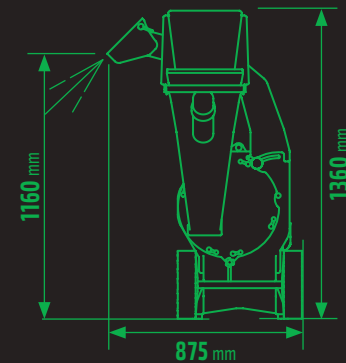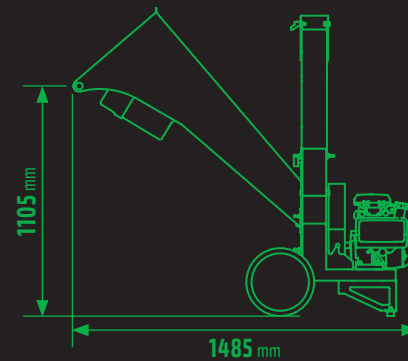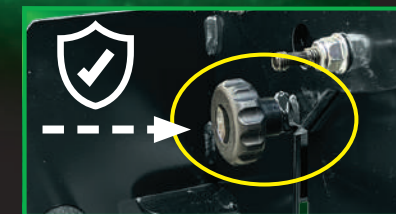

hp 13 / hp 14



			
	0 000000		kg
	R95BHP55GP	 E5	95/115
	R95BHP65	 E5	95/115
	R95BHP13	 E5	125/145
	R95BLHP7	 E5	95/115
	R95BLHP14	 E5	125/145






Three-point linkage
for tractor
≥ hp13 (kW9,6)



CAT. 1

OPTIONAL

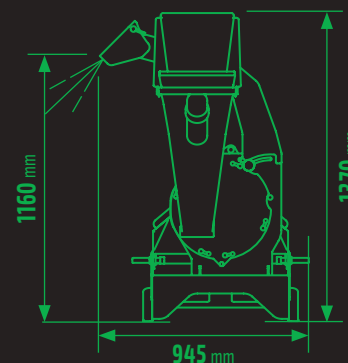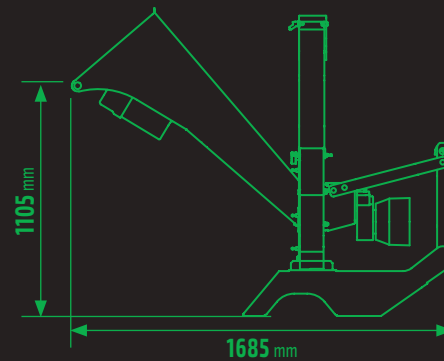

R95T



540 rpm



110/130 kg



HOBBYISTS' TOP CHOICE



6 - 7
m³/h*



600 x 585
AxB mm



160 x 150
AxB mm




90
Ø max.* mm



2



10



1


R185




+ HYDRAULIC
FEEDING
ROLLER



700 x 725
AxB mm





160 x 90
AxB mm



DISC WEIGHT: 34,2 kg



2 BLADES +
10 HAMMERS

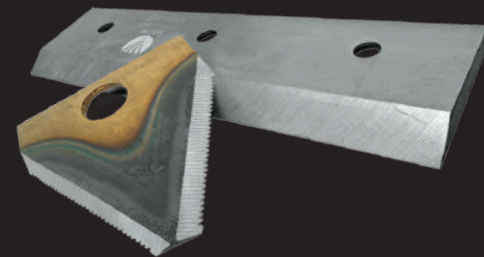

1 COUNTER-BLADE

NOSTRESS
CONTROL




Working
hours

Rotor
rotation
speed



MOBILE
REFINING
SCREEN

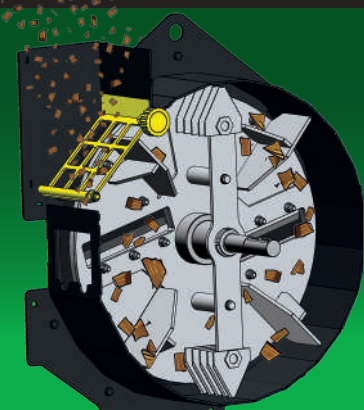



Electric
380 V - 50 Hz **hp15** (kW11)






E5

Petrol
HONDA GX390 **hp13** (kW9,6)

Petrol
LONCIN G420 **hp14** (kW10,3)

L **L/h**
6,1 **2,8**


L **L/h**
6,5 **2,8**

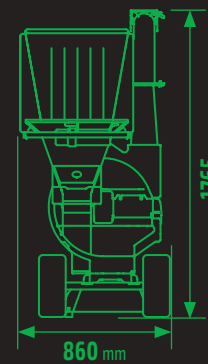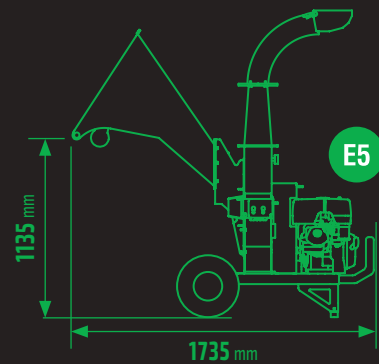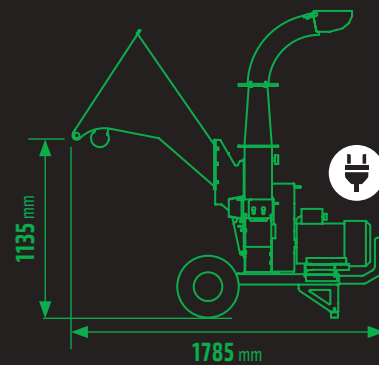



	0 000000		kg
	R185EHP15		190/202
	R185BHHHP13		205/225
	R185BLHP14		205/225



Three-point linkage
for tractor
≥ **hp15** (kW11)



OPTIONAL

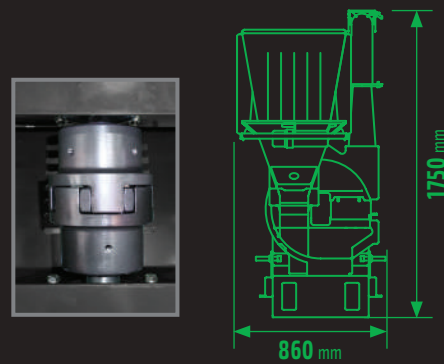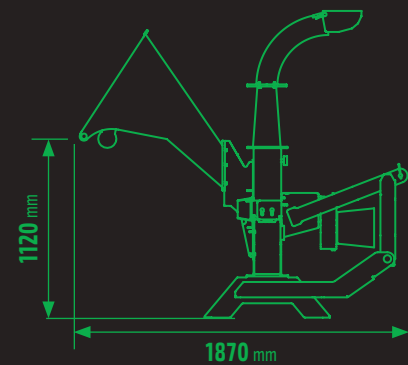

	0 000000		kg
	R185T		205/225



Electric
380 V - 50 Hz **hp15** (kW11)

E5 **Petrol**
HONDA GX390 **hp13** (kW9,6)

Petrol
LONCIN G420 **hp14** (kW10,3)







L **L/h**
6,1 **2,8**

L **L/h**
6,5 **2,8**



E5 **OPTIONAL Kit**

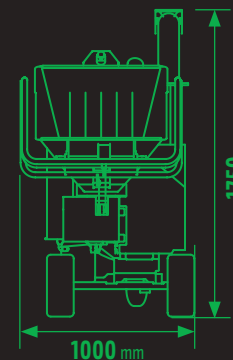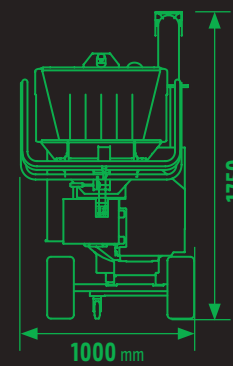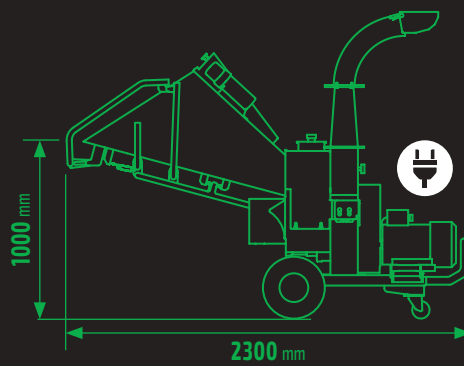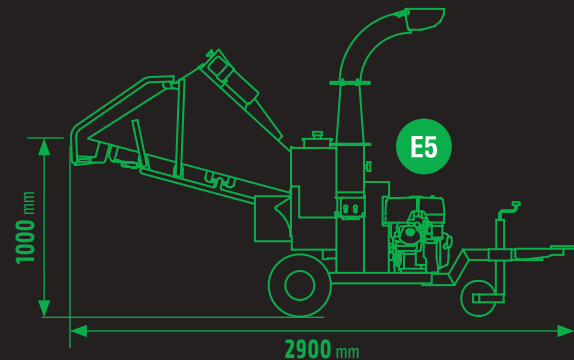



			NOSTRESS		
	R185EHP15RI				340/358
	R185BHHHP13RI			E5	340/358
	R185BHHHP13AERIN			E5	340/358
	R185BLHP14RI			E5	340/358
	R185BLHP14AERIN			E5	340/358



Three-point linkage for tractor
≥ hp15 (kW11)



OPTIONAL

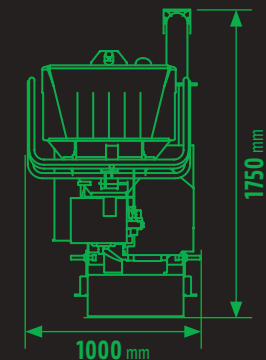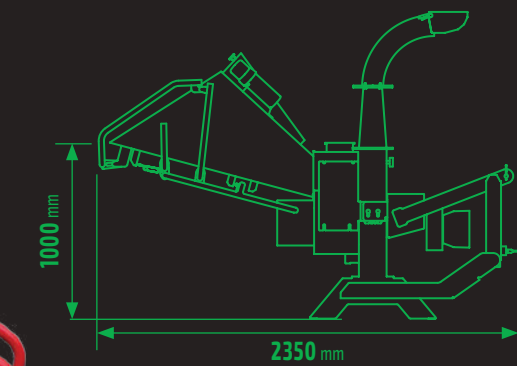

			NOSTRESS		
	R185TRI				300/318
	R185TRIN				300/318

OBS

On Board System




NOSTRESS
CONTROL

FEEDING
COMPONENTS
SPEED SETTING

STATUS
MESSAGES

HOURLY
METER

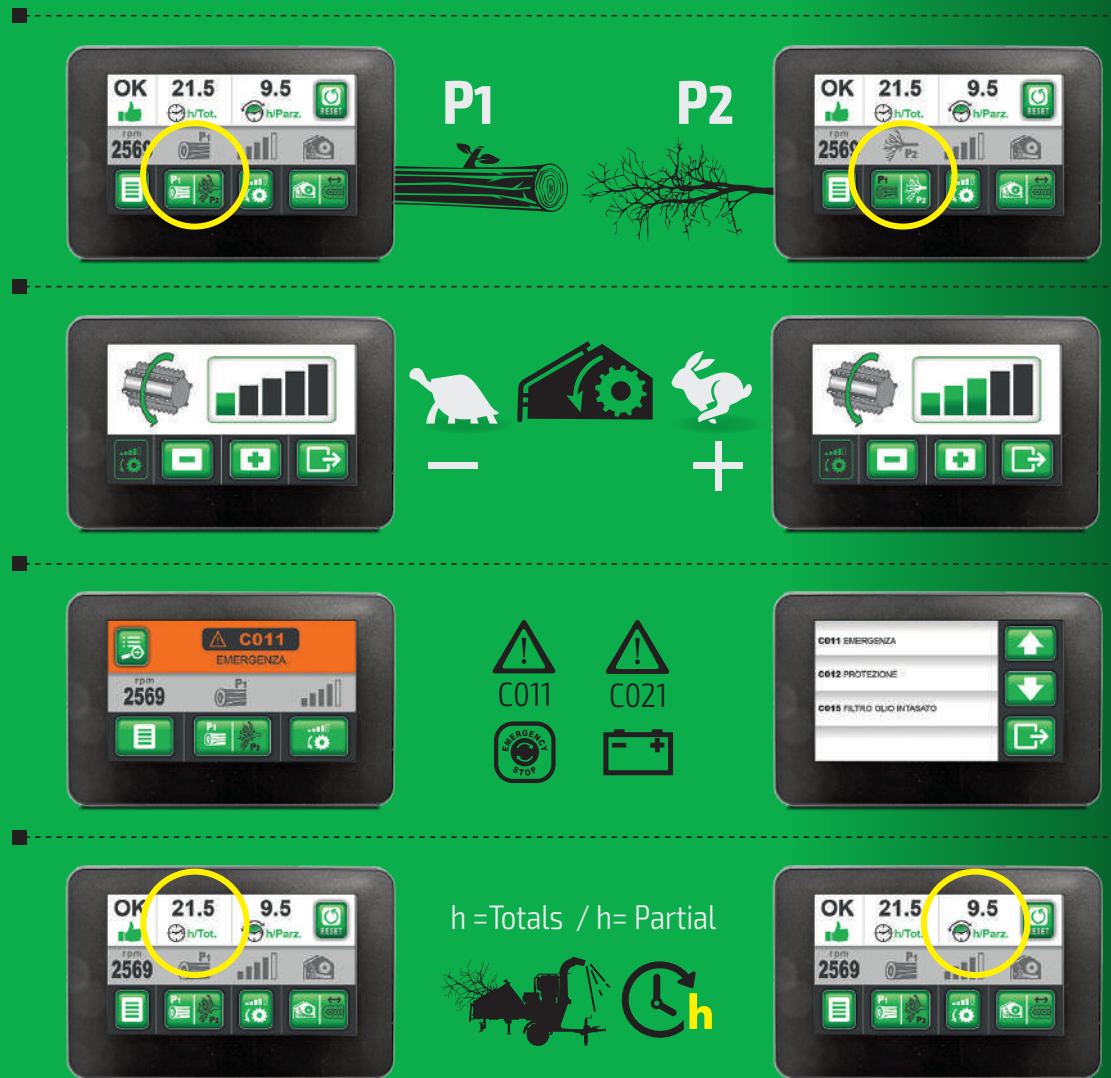

Integrated
multifunction
system
designed
to maximize
your machine's
performance.

CRS

Customer
Remote
System



OPTIONAL



Geolocation of the machine.

Management of the machine feeding devices.

Modification of the machine operating parameters.

Update of the control units installed on the machine.

Real-time reading of important operating parameters (speed, hydraulic pressure, alarms, etc.).

Generation of reports on the machine operation.




2

t/h*



810 x 700
AxB mm



162 x 150
AxB mm



150
Ø max.* mm



2



10



1

C13




DISC WEIGHT: 50 kg




2 BLADES +
10 HAMMERS




1 COUNTER-BLADE



1 HYDRAULIC
FEEDING
ROLLER



FIXED
REMOVABLE
REFINING
SCREEN





OBS
On Board
System





E5	Petrol HONDA iGX800 hp25 (kW18,5)
B7	Diesel KUBOTA D1105 hp25 (kW18,5)

	L	L/h
10	5,5	
	L	L/h
10	4,8	

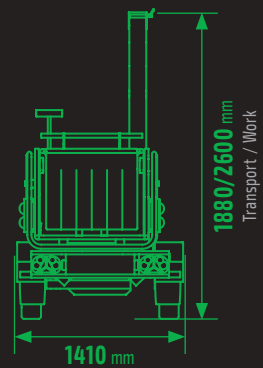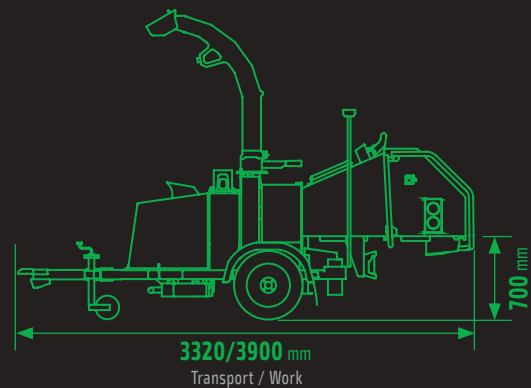



	0 000000	E5	680/780 kg
	C13BH250N	B7	750/850 kg
	C13DK260N		



Three-point linkage for tractor
≥ hp35 (kW25,7)



OPTIONAL

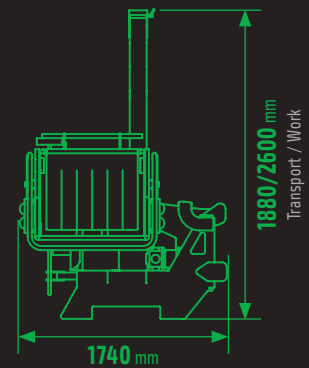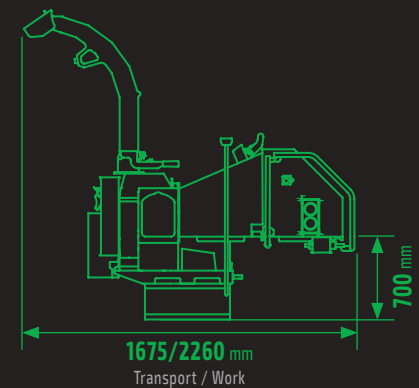


	0 000000	C 540rpm	500/545 kg
	C13TN		



7,5
t/h*



1009 x 705
AxB mm




210 x 170
AxB mm



170
Ø max.*mm



2




2

C17




DISC WEIGHT: 76,2 kg



2 BLADES



2 HYDRAULIC
FEEDING
ROLLERS

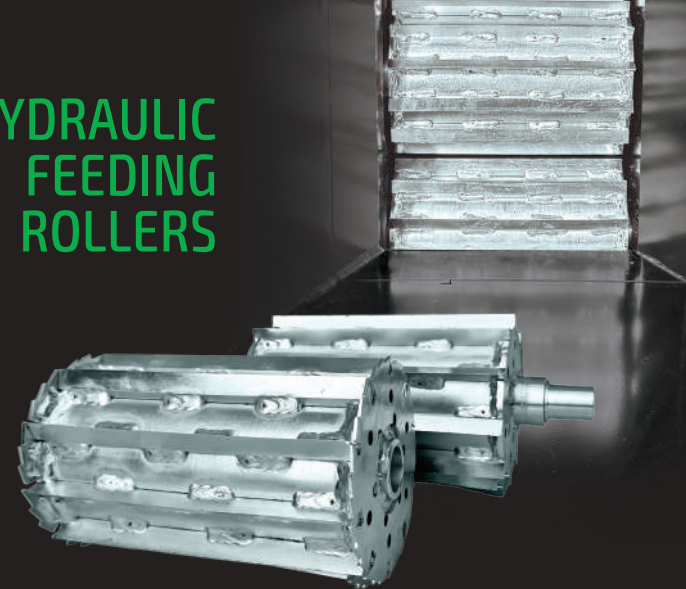

2 COUNTER-BLADE

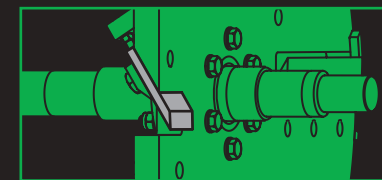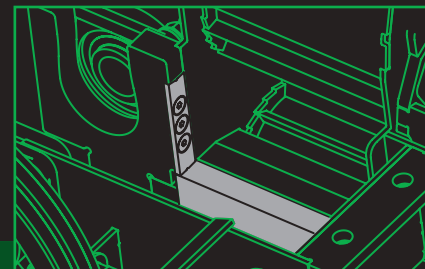

OBS



On Board System






E5 Petrol
BRIGGS & STRATTON VANGUARD
EFI40 **hp40** (kW29,9)

L **L/h**
30 **5.5**

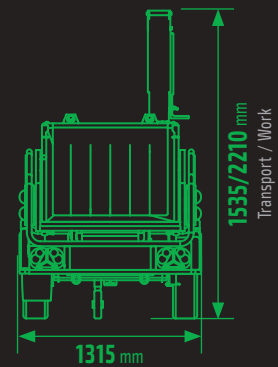
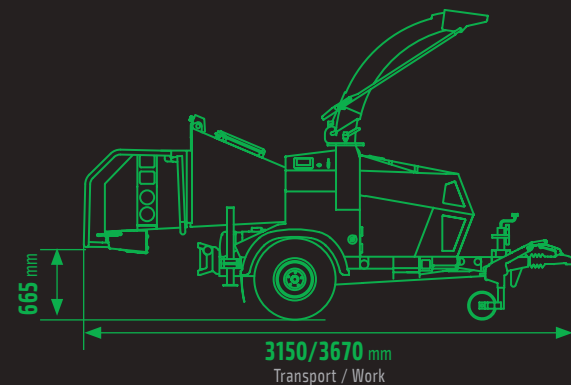


C17LTBB400N	E5	740/800	

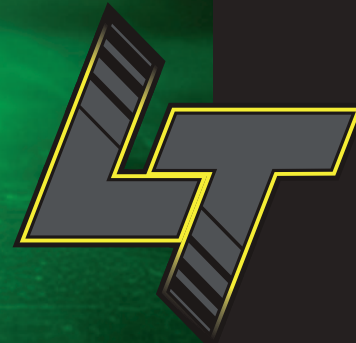

E5 Petrol
BRIGGS & STRATTON VANGUARD
EFI40 **hp40** (kW29,9)

L **L/h**
30 **5.5**

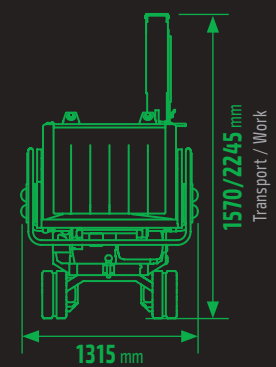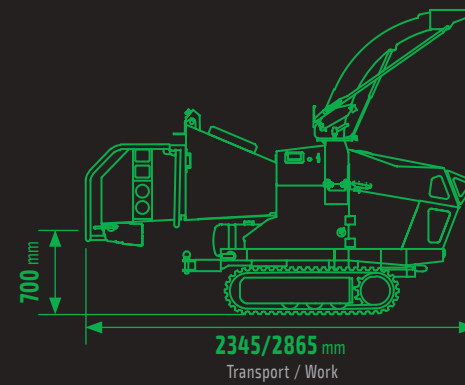


C17LTBB40CN	E5	990/1070	



3,5
t/h*



1270 x 750
Ax B mm




236 x 170
Ax B mm



170
Ø max.* mm



2




1

C17





DISC WEIGHT: 97,6 kg


2 BLADES

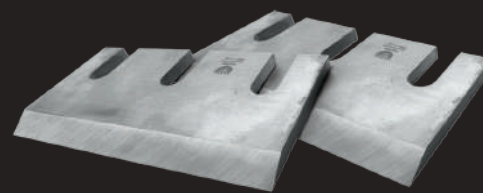

1 COUNTER-BLADE

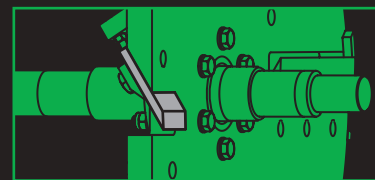

**2 HYDRAULIC
FEEDING
ROLLERS**

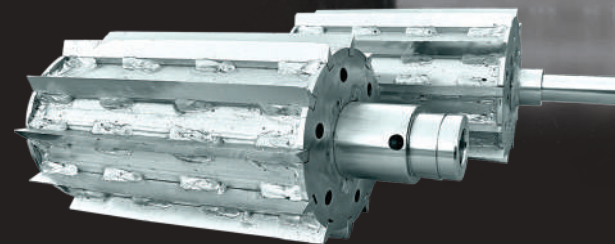

OBS
On Board System








B7 Diesel
KUBOTA V1505 **hp25** (kW18,5)

L L/h
30 5,2

E5 Petrol
BRIGGS & STRATTON VANGUARD
EF140 **hp40** (kW29,9)

L L/h
30 5,5

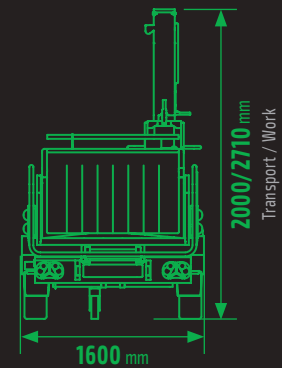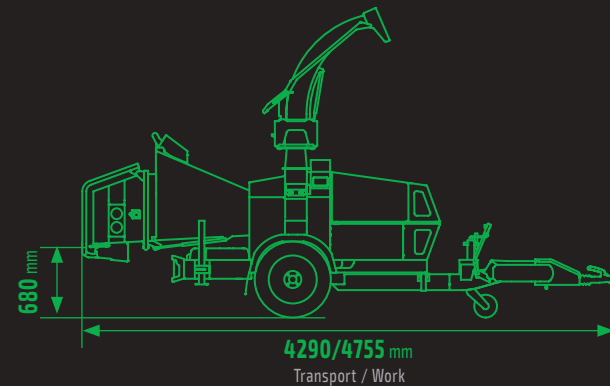

	0 000000		kg
	C17DK260TRGN	B7	1235/1365
	C17BB400TRGN	E5	1165/1295
	C17DK260TRON	B7	1235/1365
	C17BB400TRON	E5	1165/1295





B7 Diesel
KUBOTA V1505 **hp25** (kW18,5)

L L/h
30 5,2

E5 Petrol
BRIGGS & STRATTON VANGUARD
EF140 **hp40** (kW29,9)

L L/h
30 5,5

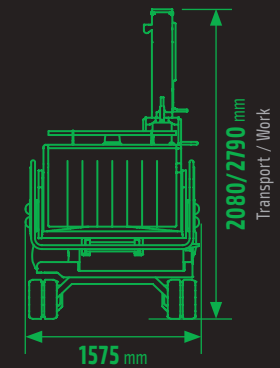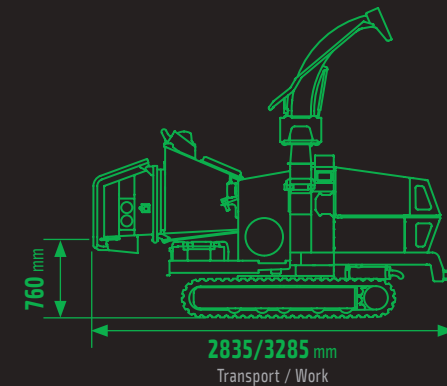



	0 000000		kg
	C17DK26CN	B7	1725/1925
	C17BB40CN	E5	1665/1865



Three-point linkage
for tractor
≥ hp40 (kW29,9)



OPTIONAL

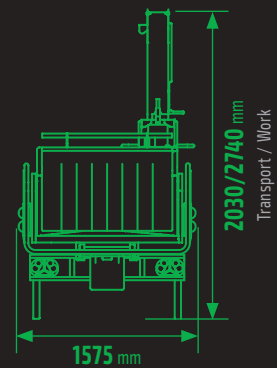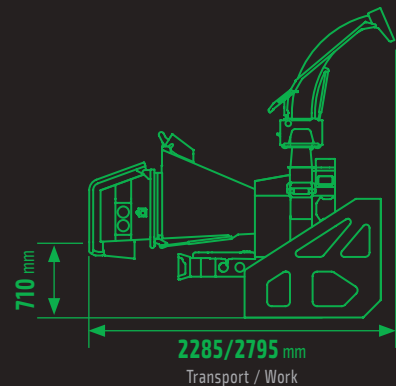

	 0 000000		 kg
	C17TPN	 C 540 rpm	935/975

DOMINATE EVERY LOG





5,2
t/h*



1350 x 840
AxB mm



276 x 210
AxB mm



210
Ø max.*mm



2




1

C21






DISC WEIGHT: 115,3 kg


2 BLADES

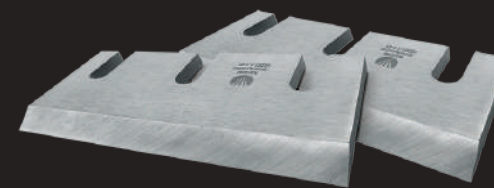


1 COUNTER-BLADE

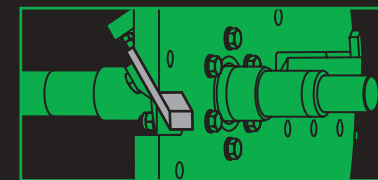

2 HYDRAULIC
FEEDING
ROLLERS

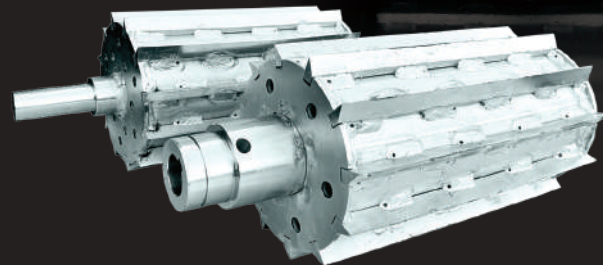

Equal Force

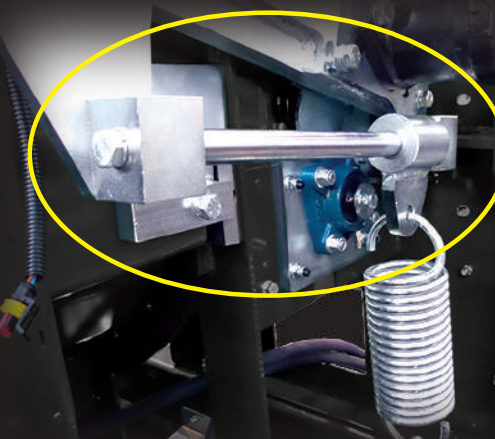


OBS
On Board
System







B7 Diesel
KOHLER KD11903TCR
hp56 (kW42)



L L/h
30 9,6

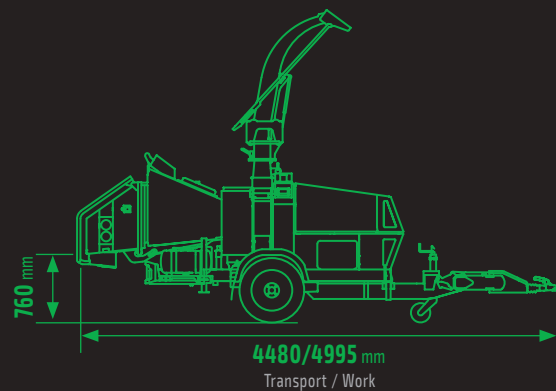



	0 000000	B7	1650/1780
	C21DL560TRGN	B7	1650/1780
	C21DL560TRON	B7	1650/1780



B7 Diesel
KOHLER KD11903TCR
hp56 (kW42)



L L/h
30 9,6

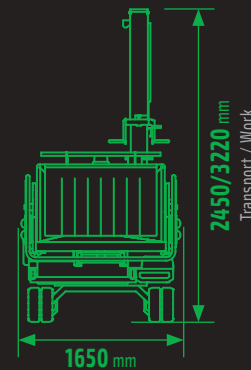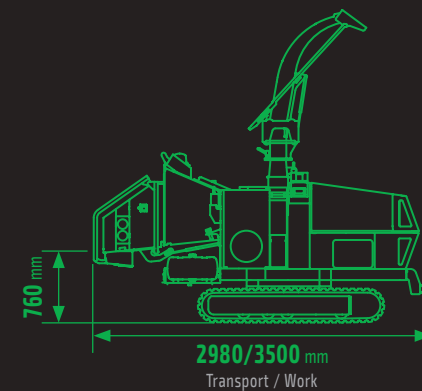


	0 000000	B7	2090/2290
	C21DL56CN	B7	2090/2290



Towed by tractor
 C 540 rpm
 ≥ hp60 (kW44)

OPTIONAL

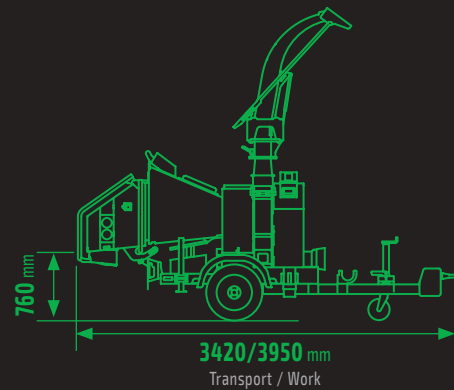

	 0 000000		 kg
	C21TTN	 C 540 rpm	1090/1230





Three-point linkage for tractor
 C 540 rpm
 ≥ hp60 (kW44)



CAT. 1/2

OPTIONAL

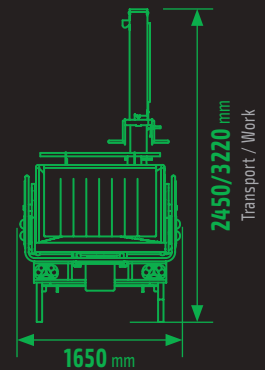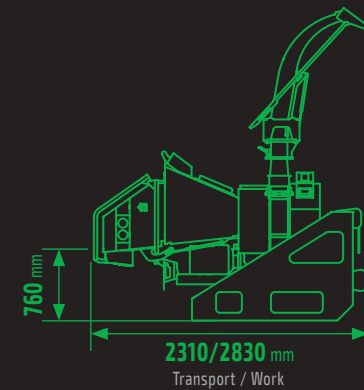

	 0 000000		 kg
	C21TPN	 C 540 rpm	1120/1160

OVERVIEW OF THE RANGE

[illegible]

* Input material/ Data depending on the kind of material and working conditions.

[illegible][illegible][illegible]



Negri S.r.l. Via Motella 33
46010 Campitello di Marcaria (Mantova), Italia
Tel. 0039 0376 926162 - Fax 0039 0376 925329
info@negri-bio.com

www.negri-bio.com

08/07/2026

